


Vega Slimline

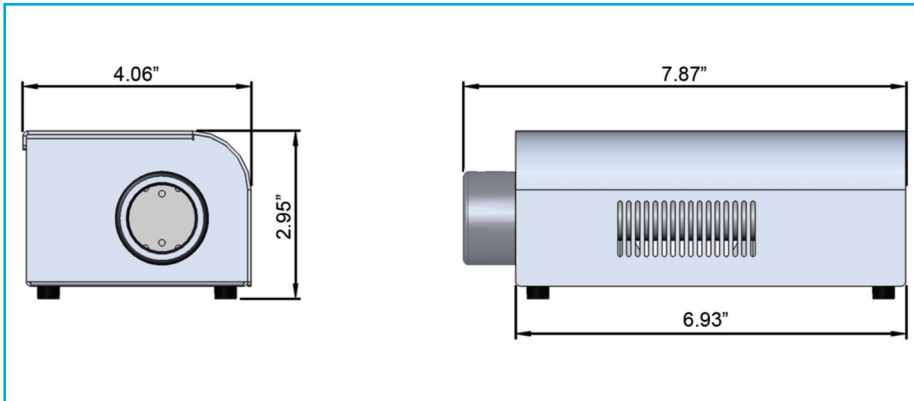

The UFO Vega offers the ultimate in LED brightness for architectural lighting projects.

With a long lamp life, and very bright white light output, the Vega fits perfectly in situations where tungsten halogen, or even metal halide options would normally be specified.

Very cool and almost silent running combined with a small unit size, make this illuminator suitable for use in restricted spaces, and when fitted in an IP rated enclosure it can easily be situated outside

Description	
Port connector size	1.18" (30mm) Diameter
Fiber type	Glass/PMMA
Mains Supply Voltage	100-240V AC, 50-60 Hz. 1.8A
PSU Output	24V DC, 2.5A, 60W Maximum
LED Power	Max. 20W
Power Connection	2.1 x 5.5 x 12mm
Min Ambient Temperature	14°F (-10°C)
Max Ambient Temperature	113°F (+45°C)
Fan	80mm 12V Crossflow
Thermal Protection	Thermal Cut Out switch 158°F (70°C)
LED Type / Model	White light
Dimming	Manual, DMX and 0-10V (receiving)
LED Life	50,000 hours in ambient 77°F (25°C)
Equivalent TH Light Output	120W
CRI	82 (typical)
Color Temperature °K	3000°K or 4000°K
Material	Aluminum
Color	Silver
Size	L: 6.23" (176mm) x W: 4.06" (103mm) x H: 2.95" (75mm)

Like all our range, this illuminator is undergoing constant improvements and upgrades, so we reserve the right to alter specifications as required.

